

INTRODUCING SCRIPT™ i

THE PERFECT ELECTROSTATIC SURROUND

Shipping Soon!

Shipping: March 25, 2003

New Retail Price: Contact your local distributor.

Introducing the Script i—everything you've come to expect from the MartinLogan Script wall-mount speaker, with the look and styling of the new Clarity loudspeaker. We bring you a new Generation 2 MicroPerf ESL transducer and a low-voltage power supply—all in a package that **mounts 3 inches closer to a wall** using Script i's new low-profile mounting bracket.


The Script i's new Generation 2 MicroPerf ESL transducer, the first major redesign of our stat panel in nearly 20 years, combines a myriad of design innovations that yield an **extremely resilient, reliable and responsive** small electrostatic transducer. We have improved the very heart of our panel, our thin film driver, by using higher performance polyethylene terephthalate which is plas-

ma bonded with a superior, reformulated alloy coating. We are achieving **greater uniformity, tighter impedance specs and maximum adhesion and abrasion resistance.**

Originally engineered for the Statement e2, ClearSpar technology now enhances Script i's transparent look and **increases both efficiency and dynamics.** MicroPerf technology decreases the size of individual stator holes, permitting the stator to drive the Generation 2 diaphragm very uniformly, **increasing sonic accuracy and maximizing efficiency, dispersion and optical transparency** of Script i's small stat panel.

We have eliminated the need for a bulky AC power cord by changing to a low voltage power supply. This **increases the ease and decreases the cost of installation**, especially for custom installers. Now, any necessary length of power cord can easily be created using simple, standard two-conductor wire as an extension. To further expand installation options, a power-out port allows multiple, low-voltage MartinLogan products to share one power supply for daisy-chain deployments.

The Script i also features a new, advanced formulation cabinet coating and selection of trim rails in silver, white bronze and black—the perfect match for any lifestyle or décor. Script i's new low-profile mounting bracket allows this versatile surround speaker to **mount flush against any wall.**

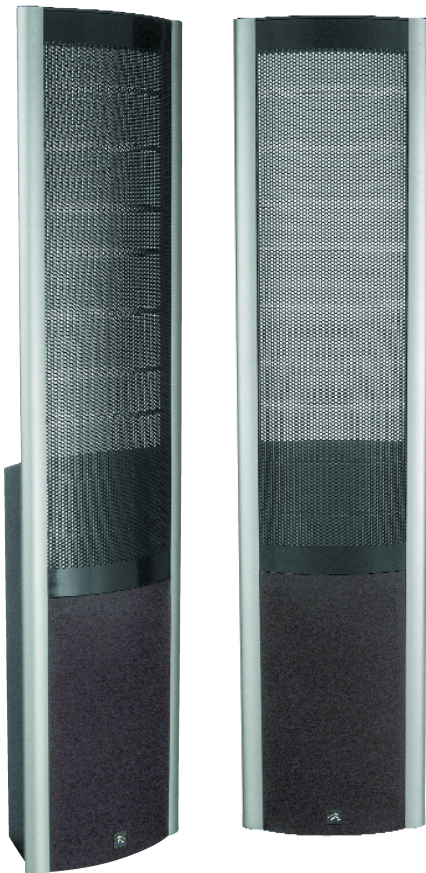

SPECIFICATIONS

Frequency Response:	70–20,000 Hz ± 3 dB
Dispersion:	30 degrees
Sensitivity:	89 dB/2.83 volts/meter
Impedance:	6 ohms, 3 ohms @ 140 Hz
Crossover Frequencies:	500 Hz
Components:	Minimal straight path design, air core coils
Woofers Type:	6.5" (16.5 cm) mineral filled poly-cone with high damping rubber surround; non-resonance asymmetrical chamber format.
Power Handling:	150 watts rms
Dimensions:	10.2" W x 6.8" D x 43.9" H 25.9 W x 17.28 D x 111.5 H cm
Weight:	22 lbs. (10 kg)



MARTIN LOGAN®

